

1

2

3

4

A



Technical sheet / Datos técnicos:

A

Part number adaptable to / Referencia adaptable a	229813
Crack pressure / Presión de rotura	0 PSI / 0.06 bar
Permissible medium / Medio de funcionamiento	Air / Aire
Operating temperature range / Rango de temperatura	-40°C to / a +80°C
Weight / Peso	270 gr

B

B

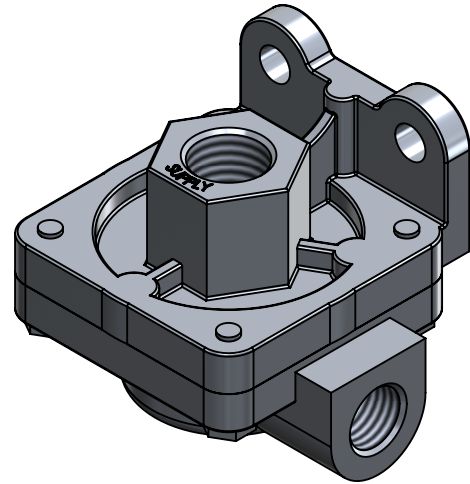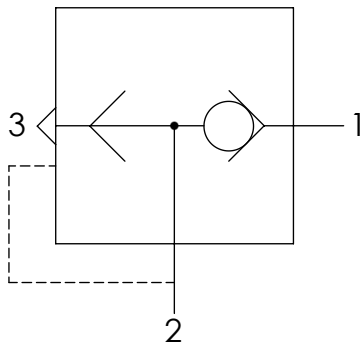

C

C

D

D

Port / Conexión	Function / Función	Thread / Rosca
1	Supply / Alimentación	3/8"
2	Delivery / Salida	2x 1/4"
3	Exhaust / Escape	-

Purpose / Propósito: To quickly eject the air from any reservoir and to achieve an increase in its operating speed. / Desalojar rápidamente el aire de los actuadores de freno para conseguir una rapidez de respuesta de frenado adecuada.

Installation requirements / Requisitos para la instalación: To install the valve with the exhaust port facing downwards. The valve must be installed using two screws M8. / Instalar la válvula con el escape orientado hacia abajo. La válvula debe ser instalada utilizando dos tornillos M8.





E

E

F

F

Modification	4				Drawn		
	3				21/08/13 A.U.		
	2				Checked		
	1				21/08/13 A.L.		
	nº	Modified	Date	Reason	General Tolerance		Assembly
Comments					-	Part name	Quick release valve
					Material	ID. Reference	2991064
					-	Scale: -	
					-	Review: 0	

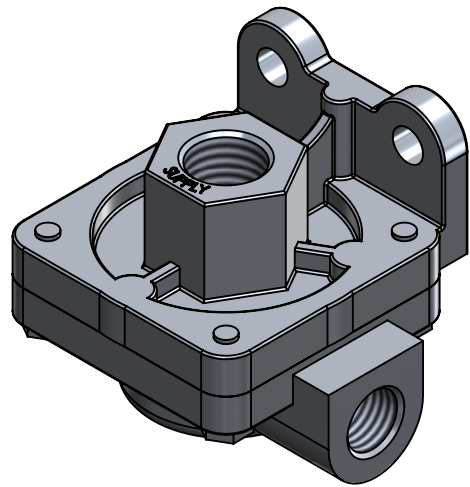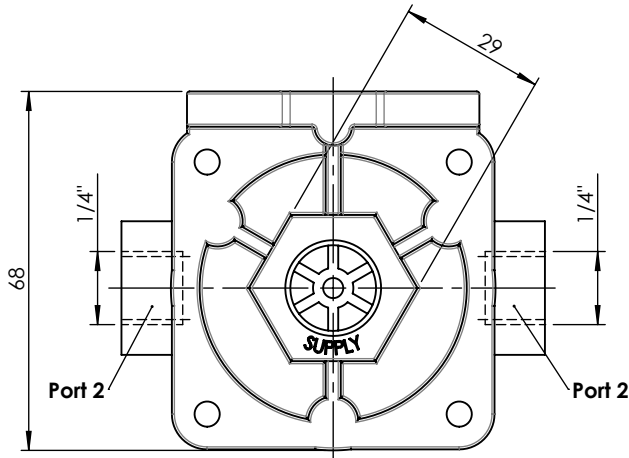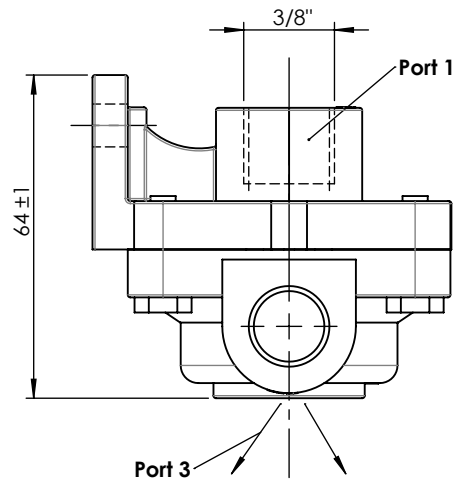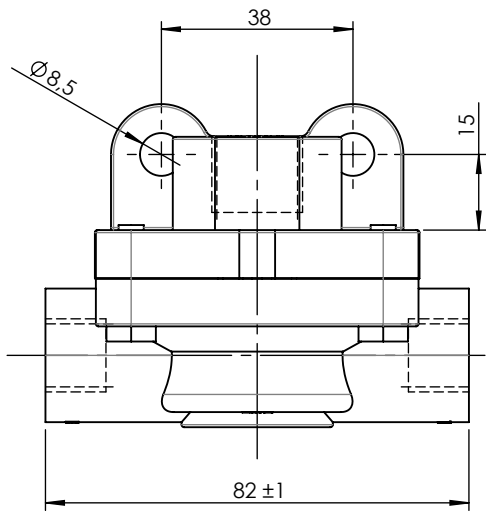

F	Modification	4				Drawn			
		3				21/08/13 A.U.			
		2				Checked			
		1				21/08/13 A.L.			
F	Comments	nº	Modified	Date	Reason	General Tolerance	Assembly	-	
							ISO 2768 c-K	Part name	Quick release valve
							Material	ID. Reference	2991064
							-	Scale: 2/3	
						Review: 0			
PG/18/02 rev.1 1		2			3		4		