
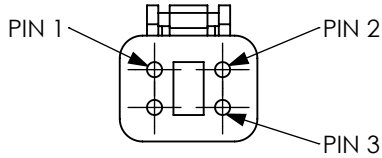



**Technical data/ Datos técnicos:**

|  |                 |
|--|-----------------|
| According to/ En referencia a:                     | 20928559        |
| Operating temperature range/ Rango de temperatura: | -40°C a/to 80°C |
| Weight/Peso:                                       | 246,5 gr        |

|       |              |
|-------|--------------|
| PIN 1 | GND/MASA     |
| PIN 2 | +5V          |
| PIN 3 | SIGNAL/SEÑAL |

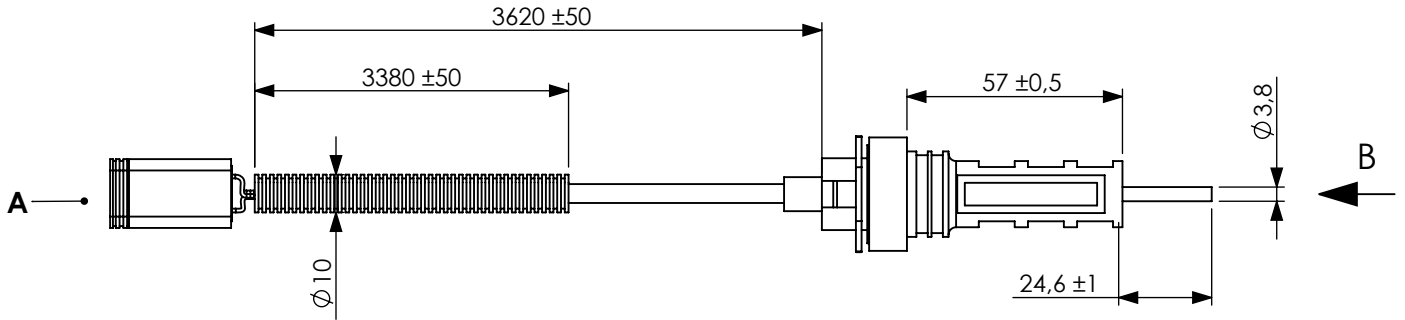

VIEW/VISTA A

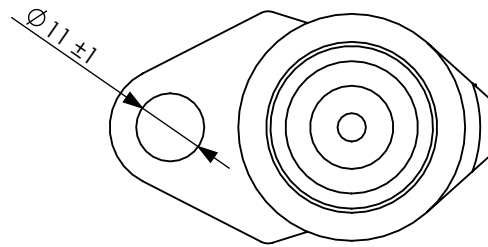

VIEW/VISTA B



|          |              |    |          |      |              |                   |                                |           |
|----------|--------------|----|----------|------|--------------|-------------------|--------------------------------|-----------|
| F        | Modification | 4  |          |      |              | Drawn             |                                |           |
|          |              | 3  |          |      |              | 16/07/20 S.F.     |                                |           |
|          |              | 2  |          |      |              | Checked           |                                |           |
|          |              | 1  |          |      |              | 16/07/20 E.L.     |                                |           |
|          |              | nº | Modified | Date | Reason       | General Tolerance |                                | Assembly  |
| Comments |              |    |          |      | ISO 2768 c-K | Part name         | Ware sensor/Sensor de desgaste |           |
|          |              |    |          |      | Material     | ID. Reference     | 2260819                        |           |
|          |              |    |          |      | -            | Scale: 1/2        |                                | Sheet 1/1 |
|          |              |    |          |      | -            | Review: 0         |                                |           |