


Technical data/ Datos técnicos:




According to / En referencia a:	20553740
Operating temperature range/Rango de temperatura:	-40°C a/to 80°C
Supply voltage/Voltaje:	24V DC ±5%
Weight/Peso:	223 gr

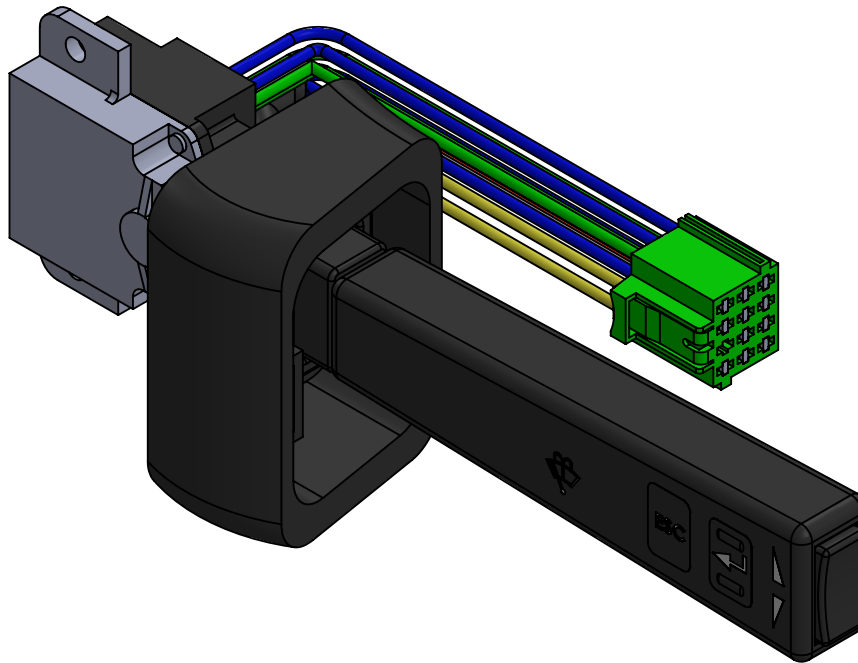

Purpose / Propósito: Activate four different positions for the wiper, the wiper pump and ESC, INTRO, up and down keys/ Permite activar cuatro posiciones diferentes del limpiaparabrisas, la bomba del limpiaparabrisas y las teclas de ESC, INTRO, arriba y abajo.

Installation Requirements / Requisitos para la instalación: fix the switch in the steering column housing, using the 2 holes located in the body of the switch / Ubicar el interruptor en el alojamiento de la columna de dirección, utilizando los 2 anclajes situados en el cuerpo del mismo.

F	Modification	4				Drawn	
		3				07/10/20 S.F.	
		2				Checked	
		1				07/10/20 E.L.	
		nº	Modified	Date	Reason	General Tolerance	
Comments					ISO 2768 c-K	Part name	Combination Switch/Interruptor de columna
					Material	ID. Reference	2260024
					-	Scale:	
						Review: 0	

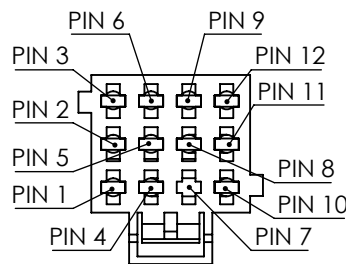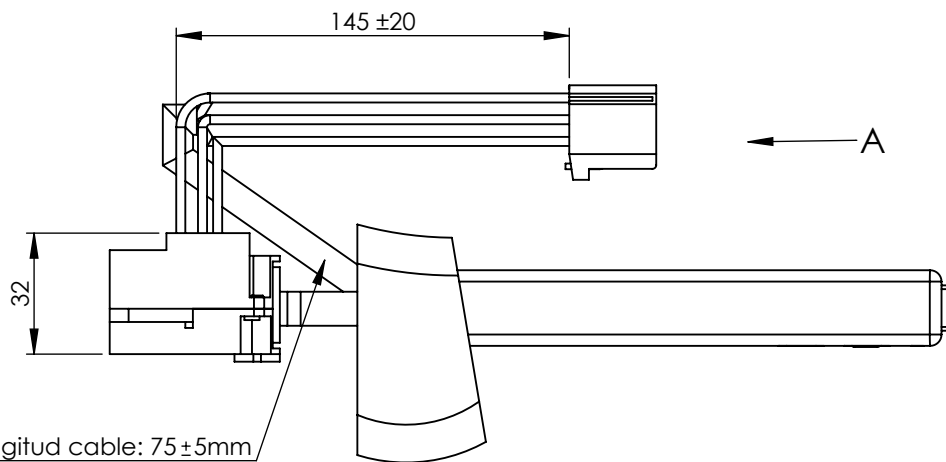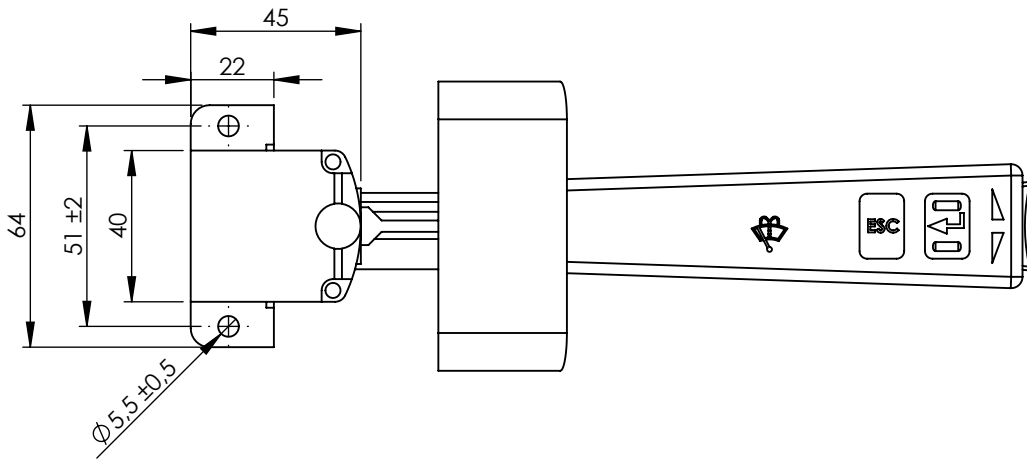

VIEW/VISTA A

F	Modification	4				Drawn		F
		3				07/10/20 S.F.		
		2				Checked		
		1				07/10/20 E.L.		
	nº	Modified	Date	Reason	General Tolerance	Assembly		
Comments					ISO 2768 c-K	Part name	Combination Switch/Interruptor de columna	
					Material	ID. Reference	2260024	
					-	Scale: 1/2		Sheet 2/2
					-	Review: 0		