


Technical data/ Datos técnicos:

According to / En referencia a:	81255090124
Operating temperature range/Rango de temperatura:	-40°C a/to 80°C
Supply voltage/Voltaje:	24V DC ±5%
Weight/Peso:	567 gr

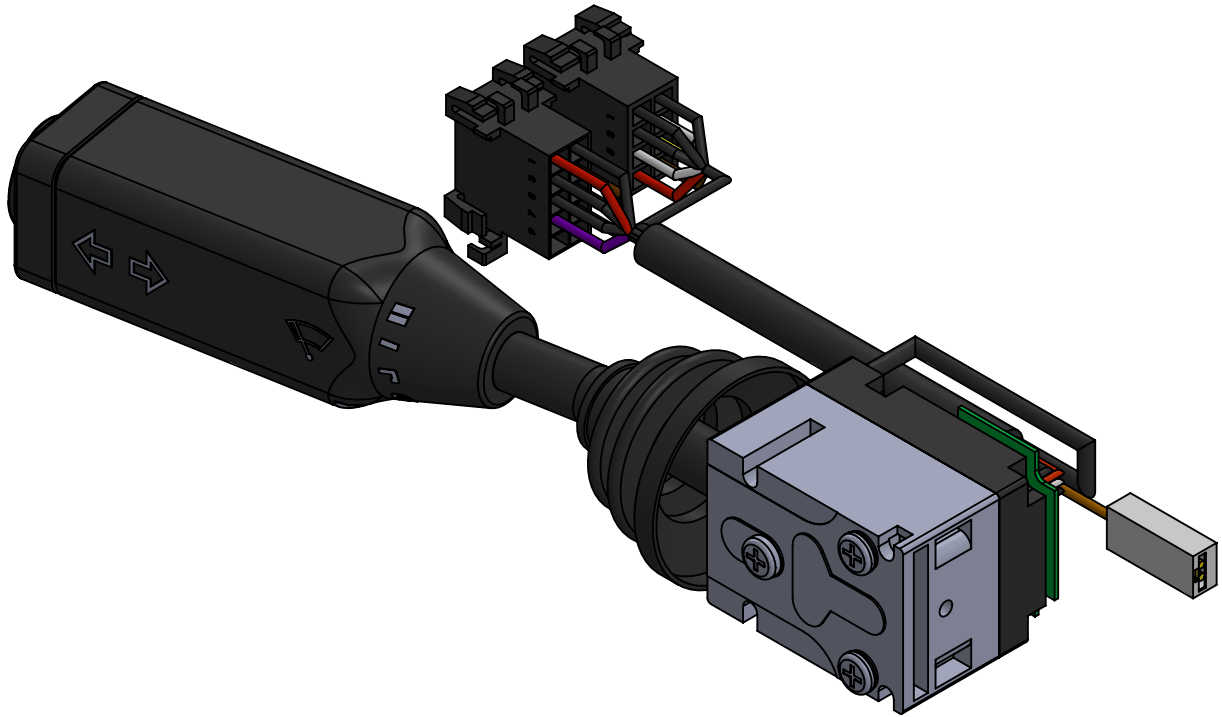

Purpose / Propósito: Activate the turn signal of the vehicle, long-range and short-range lights, main beam flash, the wiper pump and three different positions for the wiper/
 Permite activar los intermitentes del vehículo, las luces de larga y corta distancia, hacer ráfagas de luz, la bomba del limpiaparabrisas y tres posiciones diferentes para el limpiaparabrisas.

F	Modification	4				Drawn	
		3				07/10/20 S.F.	
		2				Checked	
		1				07/10/20 E.L.	
		nº	Modified	Date	Reason	General Tolerance	
Comments					ISO 2768 c-K	Part name	Combination Switch/Interruptor de columna
					Material	ID. Reference	2260183
					-	Scale: -	
					-	Review: 0	

1

2

3


4

A

A


B

B

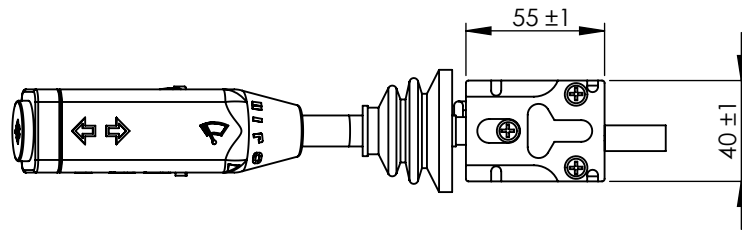


C

C

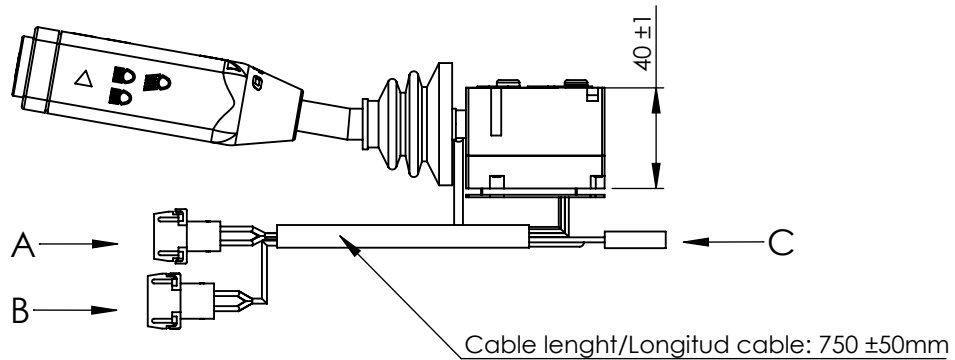


D


D

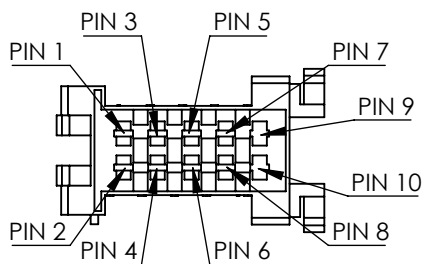

VIEW/VISTA A

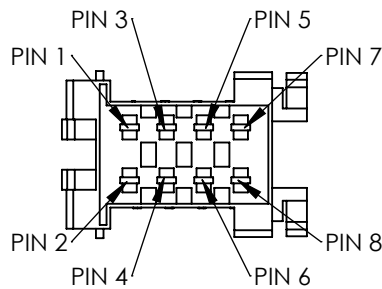



VIEW/VISTA B



VIEW/VISTA C

E

E

F	Modification	4				Drawn		F
		3				07/10/20 S.F.		
		2				Checked		
		1				07/10/20 E.L.		
	nº	Modified	Date	Reason	General Tolerance	Assembly		
Comments					ISO 2768 c-K	Part name	Combination Switch/Interruptor de columna	
					Material	ID. Reference	2260183	
					-	Scale: 1/3		Sheet 2/2
					-	Review: 0		